Pull cable at throttle body plate should be adjusted up 10 mm measuring from the bottom of the adjuster hex to the top of the jam nut.

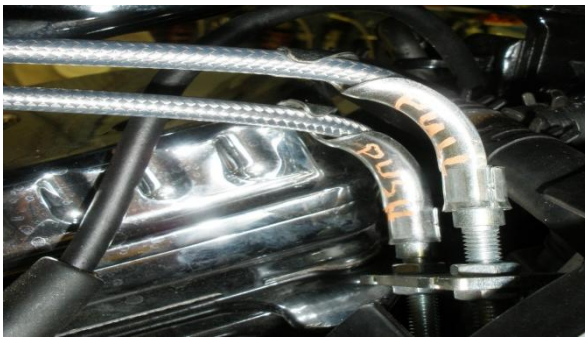

Push cable at the throttle body plate should be adjusted down all the way to the bottom of the threads

Pull cable at the handle bars the adjuster should be adjusted out approximately 9 mm OR until there is 1.5 mm on either side of the split line of the switch housing.

Push cable at the handle bars should be completely closed.